

Total 10M IP MFZ IR Dual Dome


NVM7-510-R

Features

- 5MP 2-channel camera
- Maximum resolution 2592 (horizontal) X 1920 (vertical) / 30fps per channel
- Horizontal angle of view 96 degrees (wide angle) to 31 degrees (zoom) / Optical 5x
- Day & Night (ICR) / IR reach distance 23 meters
- Backlight compensation (WDR)
- SD/SDHC/SDXC memory slot for each channel
- PoE IEEE 802.3at/Class4
- IP67/IK10



Dimension (mm)

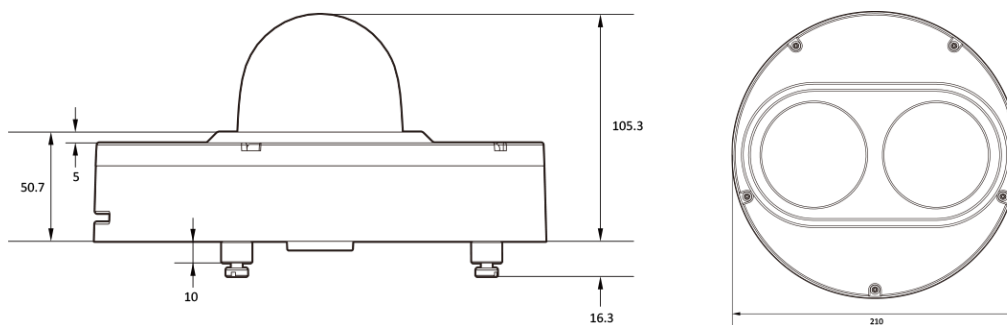

Specification

Video

Image Sensor	1/2.8" 5.69M CMOS
Channels	2
Total Pixel	2704(H) X 2104(V)
Max Resolution	2592(H) X 1944(V)
MIN. Illumination	COLOR: 0.08Lux BW: 0Lux with IR
Only installer Video Output	1 [CVBS 1.0V p-p (75Ω)]
S/N(signal/noise) Ratio	50dB
Scanning Mode	Progressive Scan

Lens

Focal Length	2.7~13.5mm
Aperture	F1.4
Lens Type	Motorized_Varifocal
IRIS Type	P-IRIS
Horizontal Angle	D:39 ~125 , H:31 ~96 , V:24 ~70
Pan / Tilt / Zoom	Zoom :X5 Optical

Operational

Shutter Speed	Auto / Manual (1/15 ~ 1/32000) Anti-Flicker Slow Shutter(1/2,1/3,1/5,1/6,1/7.5, 1/10)
Auto Gain Control (AGC)	Auto
Day & Night	TDN (True Day & Night)
Digital Noise Reduction	3D DNR
Wide Dynamic Range (WDR)	WDR(2x)
Dynamic Range	120dB or above
LEDs	H2IR
LED Distance	70ft(22m)
Privacy Zone	Yes
Function	Motion-Detection Mirror&Flip

Intelligent Video Analytic

AI Intelligent Video Analytic	No
-------------------------------	----

Encoder (video & audio)

Video Compression	H.264 H.265 MJPEG
-------------------	-------------------

Encoder (video & audio)

Support Resolution	H.265 : 2592x1944/2560x1440/1920x1080/704x576/704x480/640x480/640x360/352x288/352x240 (x2ch) H.264 : 2592x1944/2560x1440/1920x1080/704x576/704x480/640x480/640x360/352x288/352x240 (x2ch) MJPEG : 1920x1080/1280x720/800x600/768x432/704x576/704x480/640x480/640x360/352x288/352x240 (x2ch)
Intelligent Codec	Yes
Multiple Profile Streaming Performance	Dual Triple Streaming(3rd Only MJPEG)
Video BitRate	100Kbps~10Mbps
Bitrate Control	Multi Streaming CBR/VBR at H.264,H.265 (Controllable frame rate and Bandwidth)
Video Bitrate extra comment	Multi-rate for Preview and Recording
Audio Compression	G.711 ulaw
Special Feature	Dynamic ROI(Region of Interest)

I/O & Event

Audio In / Out	1 Line Input[1.0Vrms, 3K ohm]/1 Line Output
Alarm In / Out	1 Line/1 Line
Mic	No
Event Trigger	Motion Alarm Network Disconnection Temperature Critical Illegal Login Schedule Sensor Detection
Event Notification	FTP E-Mail Alarm Out SD Card

Network

Ethernet	RJ45 (10/100Base-T)
Protocol	TCP/IP UDP AutoIP RTP(UDP/TCP) RTSP NTP HTTP HTTPS SSL DNS DDNS DHCP FTP SMTP ICMP SNMPv1/v2/v3(MIB-2) ONVIF
Security	HTTPS(SSL) IP filtering 802.1x Digest Authentication
Application Programming I/F	CGI API ONVIF
Web viewer	MS Edge® Google Chrome®
Video management software (VMS)	DW Spectrum® IPVMS
Support languages	English Korean Japanese
Edge storage	Micro SD Micro SDHC Micro SDXC
SD Card Socket	2

Electrical

Power Requirement	Adaptor is not included DC12V PoE IEEE 802.3at Class4
Power consumption	DC Max: 21.6W PoE Max: 25.4W

Environmental

Operating Temperature	-20°C ~ 50°C
Cold Start	No









Environmental

Operating Humidity	10-90% RH(Non-Condensing)
Vandal Proof Casing	IK10
IP Rating	IP67
Other Certification	FCC CE ROHS UL KC

Mechanical

Housing Model	VM7
Housing	Outdoor Dome Multi-Sensor
Material	Aluminum-Die Casting
Color	White
Dimensions (W x D x H)	210mm 105.3mm
Weight	2.1kg

Compatible Accessories

 <p>BC15 NPT</p>	 <p>BW15 Wall Bracket</p>	 <p>BW16 Wall Junction Bracket</p>	 <p>BR07 Inceiling Bracket</p>
 <p>BJC06 Junction Bracket</p>	 <p>BC15 Ceiling Bracket</p>	 <p>BP01 Pole Mount Bracket</p>	 <p>BCO01 Corner Mount Bracket</p>